



The MF565 submersible pump with a 60mm solids clearance offers reliable and effective dewatering. The compact shape and small sump requirements ensure a quick and cost effective installation of the pump. Easy Fit cable connector offers simple replacement of a damaged cable without disassembling the pump. Can be supplied free standing, or pedestal mounted for permanent installations.

APPLICATION

- Factories and warehouses
- Housing developments
- Commercial buildings
- Retail and leisure
- Domestic properties

SUITABLE FOR

- Foul water
- Ground water
- Surface water
- Storm water
- Grey water


IMPELLOR TYPE

- Vortex

KEY FEATURES

- Stainless steel upper lid, rotor shaft and fasteners. Cast iron motor housing and volute. Polyamide impellor. Neoprene cable.
- Vortex hydraulics for blockage free pumping in critical applications.
- Internal thermal protection.
- Suitable for foul, ground, surface, storm and grey water applications.

PUMP CURVE

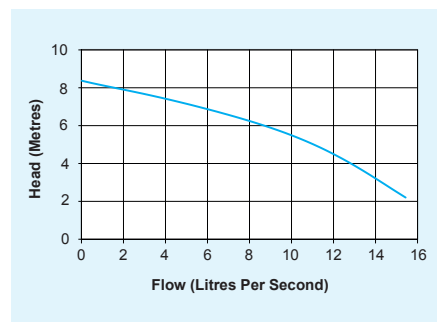

DIMENSIONS

MF565	
Height	497mm
Width	195mm
Length	253mm

TECHNICAL SPECIFICATIONS

MF565	Single Phase
Power Supply	230V AC
Rated Current	11.6A
Motor Rating	1840W
Frequency	50Hz
Revolutions Per Minute	2900rpm
Max. Vertical Output	8.2m
Max. Flow Rate	900 l/min
Max. Liquid Temperature	<40°C
Discharge Size	2½"
Free Passage	60mm
Cable Length	10m
Weight	24kg
Colour	Black / Silver
Impellor Type	Vortex
Control	Manual / Automatic