

# MF665



The MF665 submersible pump with a 60mm solids clearance offers reliable and effective dewatering. The compact shape and small sump requirements ensure a quick and cost effective installation of the pump. Easy Fit cable connector offers simple replacement of a damaged cable without disassembling the pump. Can be supplied free standing, or pedestal mounted for permanent installations.

#### APPLICATION

- Factories and warehouses
- Housing developments
- Commercial buildings
- Retail and leisure
- Domestic properties

#### SUITABLE FOR

- Foul water
- Ground water
- Surface water
- Storm water
- Grey water


#### IMPELLOR TYPE

- Vortex

#### KEY FEATURES

- Stainless steel upper lid, rotor shaft and fasteners. Cast iron motor housing and volute. Polyamide impellor. Neoprene cable.
- Vortex hydraulics for blockage free pumping in critical applications.
- Internal thermal protection.
- Suitable for foul, ground, surface, storm and grey water applications.

#### PUMP CURVE

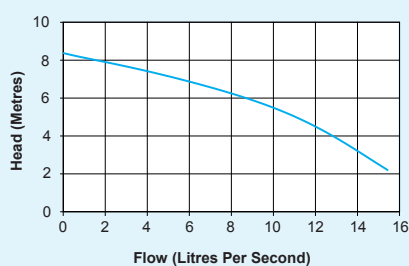

#### DIMENSIONS

MF665	
Height	497mm
Width	195mm
Length	253mm

#### TECHNICAL SPECIFICATIONS

MF665	Three Phase
Power Supply	415V AC
Rated Current	4.64A
Motor Rating	2000W
Frequency	50Hz
Revolutions Per Minute	2900rpm
Max. Vertical Output	8.2m
Max. Flow Rate	900l/min
Max. Liquid Temperature	<40°C
Discharge Size	2½"
Free Passage	60mm
Cable Length	10m
Weight	24kg
Colour	Black / Silver
Impellor Type	Vortex
Control	Manual / Automatic