SUBMERSIBLE PUMPS

Calpeda GXRM-9

9018102 / 9018103 / 9018104

GXRM-9
#9018104

GXRM-9-GF
#9018103

GXRM-9-SG
#9018102

The Calpeda GXRM-9 is a range of 230V stainless steel submersible pumps with a 10 mm clear opening. Its open impeller is suitable for ground, surface, storm and grey water and treated effluent from a sewage treatment plant.

It is not suitable for highly abrasive, viscous fluids or untreated sewage.

Our range comprises:

- An automatic pump with a cable float. Optionally, it can be used in conjunction with Edincare's stainless steel low-level float bracket.
- An automatic pump with a compact magnetic tube style float.
- A manual pump which can be used in conjunction with a control panel and separately-installed level controls such as floats, probes, or a level transducer.

KEY FEATURES

- 230 V single-phase power supply
- Open impellor
- Free standing
- Stainless steel shaft and case
- 10 m power cable (UK plug)
- Internal thermal protection
- Insulation class F
- Double shaft seal with oil chamber
- Motor constructed in accordance with EN 60034-1
- Thermal overload protection and moisture-proof dry winding
- Double shaft seal with oil chamber
- Liquid temperature up to 50°C
- Maximum immersion depth: 5 m
- Motor cooled by the pumped water passing between the motor jacket and the external casing.
- Does not include an integral non-return valve

WASTE TYPE

Grey Ground Surface Storm

LOW LEVEL FLOAT KIT

The kit comprises a stainless steel bracket complete with fixings. The bracket can be used for low-level switching of the pump.
A Small Mac3 float (#3130127, sold separately) can be attached for use with a range of alarms including Edincare's AquaSafe Alarm.

Product code: XXXXXX

Shown with optional high level alarm float, sold separately.

PUMP CURVE

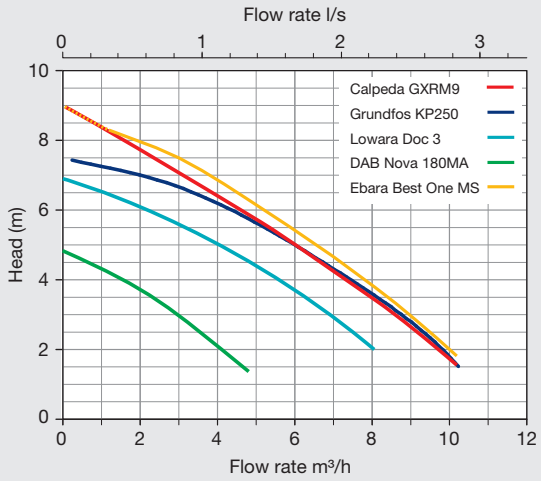

TECHNICAL SPECIFICATIONS

	GXRM9	KP250	DOC3	180MA	Best One
Rated current (A)	2.5	2.3	1.4	0.9	2.3
P2 motor rating (W)	250	250	250	200	250
Max. head (m)	9.0	7.5	6.9	4.9	9.0
Max. flow rate (l/s)	2.8	3.1	2.3	1.4	2.8
Discharge size	1¼"	1¼"	1¼"	1¼"	1¼"
Free passage (mm)	10	10	10	5	10
Discharge height (mm)	230	214	188	253	231

+44 (0)1442 211554
info@edincare.com
www.edincare.com
edincarepumps
Unit 7, Heron Business Park, Eastman Way,
Hemel Hempstead, Hertfordshire, HP2 7FW

edincare® PUMPS

Our policy is one of continuous product improvement, we reserve the right to change specifications and prices without prior notice. All information is given in good faith. No responsibility can be accepted for errors, omissions or incorrect assumptions. © 2026 Omni Pump International Ltd t/a Edincare Pumps & Edincare Drains.

Calpeda GXRM9

FEATURES

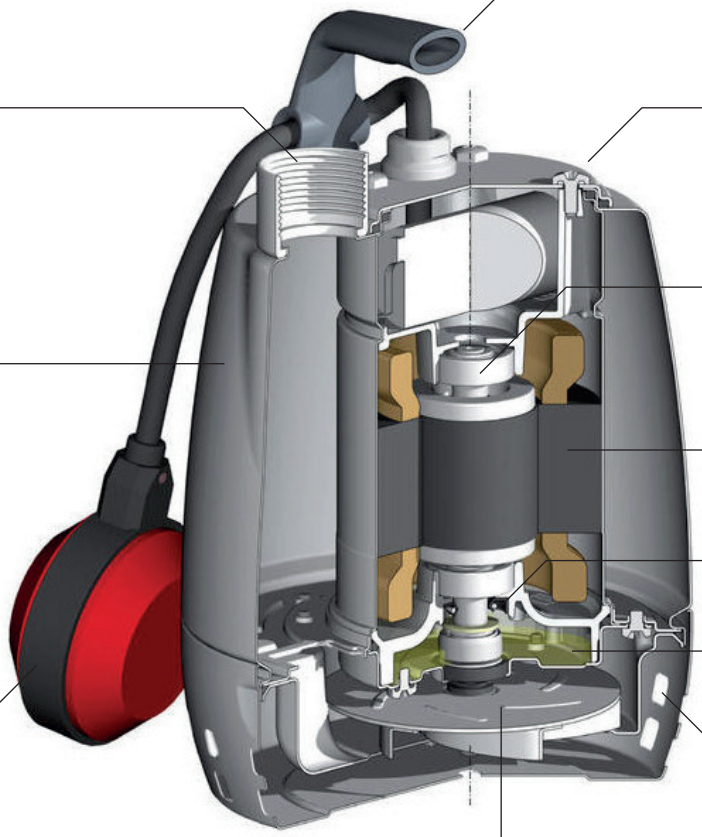

DIMENSIONS

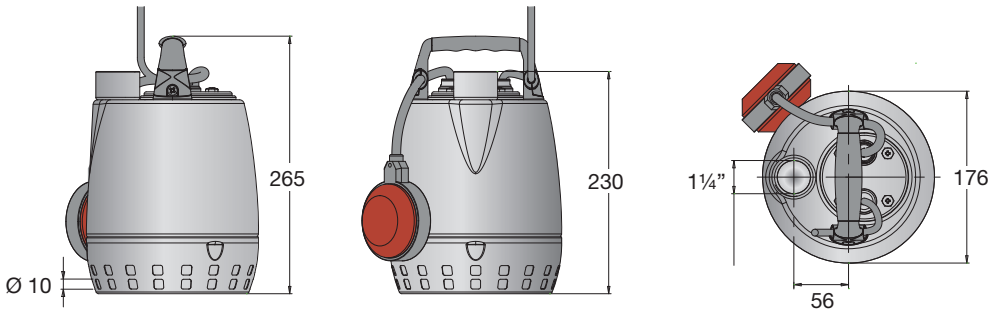

5.2 kg nett weight inc. 5 m cable

+44 (0)1442 211554
info@edincare.com
www.edincare.com
edincarepumps
Unit 7, Heron Business Park, Eastman Way,
Hemel Hempstead, Hertfordshire, HP2 7FW

edincare® PUMPS

Our policy is one of continuous product improvement, we reserve the right to change specifications and prices without prior notice. All information is given in good faith.
No responsibility can be accepted for errors, omissions or incorrect assumptions. © 2026 Omni Pump International Ltd t/a Edincare Pumps & Edincare Drains.