# MagnaPro 800-1250 Vortex (1-phase)



#### SYSTEM OVERVIEW





2" Class E PVC pipework

63 mm MDPE discharge

2" brass valves

Control panel with 3 floats and counterweights



1 pedestal-mounted manual pump

with guide rails and lifting chains



110 mm inlet



110 mm cable duct



110 mm vent

The MagnaPro 800-1250 Vortex is a fully automatic packaged pumping station suitable for pumping grey, surface, storm or foul water to a higher level when gravity drainage is not possible and/or economical to install.

The system provides up to 325 litre storage capacity depending inlet depth. It is ideal for accepting waste from an extension, outbuilding, basement or similar.

The pump's vortex impellor provide reliable and effective pumping of grey and foul

It can accept foul waste if the property also has another method of removing foul waste. Contact our Sales Team if you require a foul water packaged pumping station to serve the whole property.

The system comprises our award-winning polyethylene MagnaPro chamber, internal Class E PVC pipework and fittings, brass valves, control panel, float switches with counterweights, a pedestal-mounted manual pump with vortex impellor, and an external compression adaptor for discharge to 63 mm OD MDPE.

It is easy to install as inlets can be positioned to your site's requirements. Inlet information to be supplied at time of order, or can be drilled on site.

An access cover is not included. A range of access covers is available to suit your project requirements.

Our packaged pumping stations are built to last and designed to be easy to service.

### **KEY FEATURES**

- Vortex impellor for high flow rates
- Up to 325 litres storage capacity
- 60° benching
- Compact chamber for limited space installations
- · Ideal for an extension, outbuilding, basement or similar application
- 600 mm x 450 mm clear opening
- · Variable inlet positions to suit site
- · A range of alarms and remote alerts are available offering peace of mind
- Quick and simple to install

#### **SPECIFICATIONS**

MagnaPro 800 Vortex systems comply with:

- BS EN 12050-2:2015 Wastewater lifting plants for buildings and sites. Lifting plants for faecal-free wastewater.
- BS EN 12050-3:2015 Wastewater lifting plants for buildings and sites. Lifting plants for limited applications.

# **WASTE TYPE**













#### **OPTIONAL EXTRAS**









All our products can be customised to your requirements. For more information and advice please call our Sales Team on 01442 211554.







Level








equipment monitoring






# MagnaPro 800-1250 Vortex (1-phase)

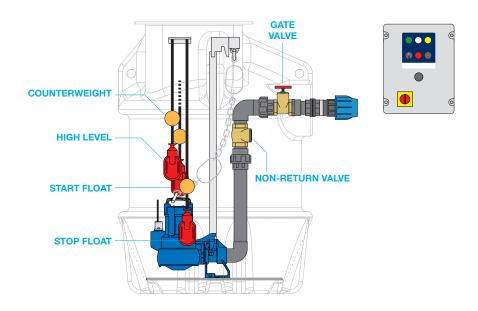


#### **PUMP SPECIFICATIONS**


| Number of pumps      | One     |
|----------------------|---------|
| Impellor type        | Vortex  |
| Control              | Manual  |
| Power supply         | 230 VAC |
| Rated current        | 6.0 A   |
| Motor rating (P2)    | 750 W   |
| Revolutions per min. | 2900    |
| Discharge size       | 2"      |
| Free passage         | 45 mm   |
| Max. vertical output | 12 m    |
| Max. flow rate       | 6.3 l/s |
| Max liquid temp.     | <40 °C  |
| Cable length         | 10 m    |
| Weight               | 23 kg   |

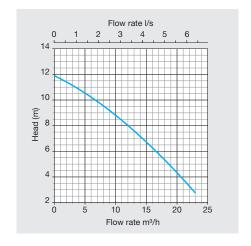


#### **CHAMBER DIMENSIONS**

Shows indicative capacities from lowest inlet invert.







# **Permitted connection positions**

#### **CHAMBER SPECIFICATIONS**

| Internal pipework                    | 2" OD Class E PVC                        |
|--------------------------------------|--|
| Discharge pipework                   | 63 mm OD MDPE                            |
| Lifting eyes                         | 4 no                                     |
| Maximum storage capacity             | 325 litres                               |
|                                      |  |
| Chamber material                     | Tank-grade polyethylene                  |
| Chamber material  Dimensions (Ø x H) | Tank-grade polyethylene<br>900 x 1250 mm |
| onambor material                     | 0 1 7 7                                  |

#### **CONTROL PANEL SPECIFICATIONS**

| Enclosure              | ABS plastic, IP54  |
|------------------------|--------------------|
| Volt-free contact      | No                 |
| Voltage                | 240 V              |
| Volted contact         | 24 V               |
| Dimensions (H x W x D) | 380 x 300 x 180 mm |



#### **DELIVERING PUMPED AND DRAINAGE SOLUTIONS FOR OVER 30 YEARS**

**Packaged pumping stations** 

**Waste water pumping systems** 

**Macerators and macerating toilets** 

Floor mounted pumping stations

Fat, oil and grease separating systems

**Rainwater harvesting systems** 

**Battery backup systems** 

Adoptable pumping stations

Submersible pumps

**Accessories** 



We provide pumped and drainage products and services to the public and private sectors, including residential, commercial, hospitality and retail.

We are proud of the long-term relationships we have built with our clients and partners, delivering cost effective, robust and dependable products and services.

#### **PROJECT SERVICES**

- Project design
- Site surveys
- Installations
- Refurbishments

# **AFTERSALES SERVICES**

- Planned servicing
- · Emergency call outs
- Commissioning
- Monitoring

# **DRAINAGE SERVICES**

- Tankering
- Cleaning and de-scaling
- Jetting
- Structural repairs
- Drainage CCTVExcavations
- Surveys
- · Root cutting

#### **12-MONTH GUARANTEE**

Your products are protected by a 12-month guarantee. Please refer to our Terms and Conditions at www.edincare.com

#### **HOW TO ORDER**

Order online at www.edincare.com Call Sales on 01442 211554 Email sales@edincare.com

# www.edincare.com

- Discover our products and services
- Order products online
- Case studies and articles
- · Brochures and technical documents

# **Protect your property with an Edincare Service Agreement**

As with all pumped and drainage systems, regular maintenance is essential to ensure optimum performance and minimal downtime. Our Service Agreements comprises planned preventive maintenance visits at an agreed frequency, we also service other manufacturers' equipment regardless of type, make and age.

- ✓ Validates your building insurance
- Reduces the risk of failure
- ✓ Increases the life expectancy of your equipment
- ✓ Priority callouts and 24/7 out-of-hours service
- Reduced rates for emergency call outs
- Flexible payment options (Direct Debit)





+44 (0)1442 211554 info@edincare.com

www.edincare.com **In** edincarepumps Unit 8, Heron Business Park, Eastman Way, Hemel Hempstead, Hertfordshire, HP2 7FW





















